



Σενάριο: Συνδρομητής επιθυμεί την παράλληλη λήψη των τηλεοπτικών προγραμμάτων του OTE και συνδρομητικών/ελεύθερων καναλιών από τον HotBird.

Εγκατάσταση: Θα πρέπει να υπάρχει κεραία με διάμετρο μεγαλύτερη των 75εκ και να χρησιμοποιηθεί ένα Duo-kit LNB (δύο LNB σε ειδική βάση) με ένα διακόπτη DiSEqC ή ένα Duo LNB και ένας μεταγωγικός διακόπτης.


Συνδεσμολογία 1: με χρήση Duo-kit LNB

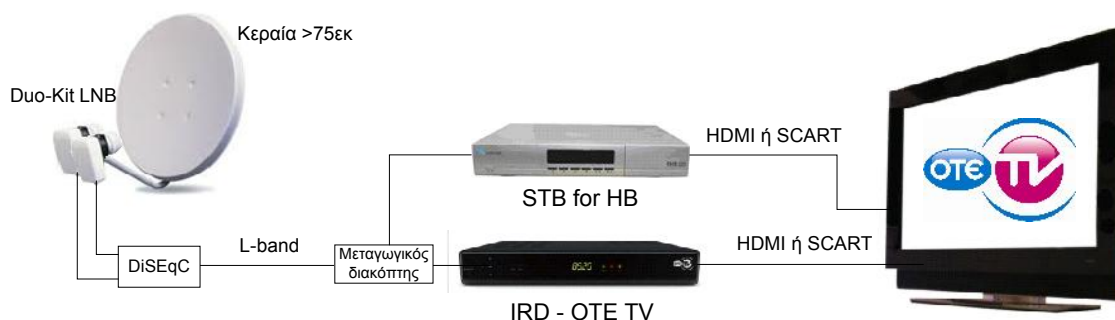


Συνδεσμολογία 2: με χρήση Duo LNB

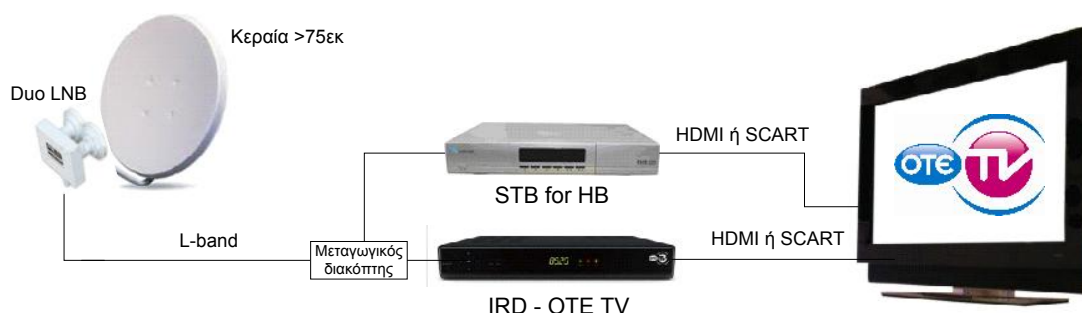

Μεταγωγικός Διακόπτης: Ένας κατάλληλος μεταγωγικός διακόπτης είναι ο τύπος SAR 12 F της εταιρείας SPAUN και συνδέεται ως εξής.

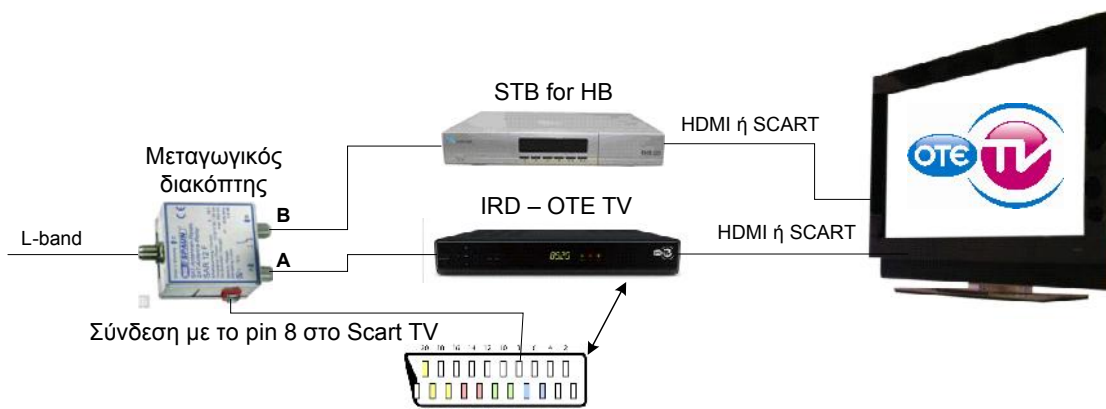


- Στην είσοδο C (F-type) θα συνδεθεί η κάθοδος της κεραίας,
- η έξοδος B (F-type) θα συνδεθεί με την είσοδο του δέκτη (F-type) για τα προγράμματα του HotBird,
- η έξοδος A (F-type) θα συνδεθεί με την είσοδο του δέκτη (F-type) για τα προγράμματα του OTE και
- θα πρέπει να συνδεθεί μέσω καλωδίου η επαφή του διακόπτη με το pin 8 του SCART (TV ή VCR) του δέκτη OTE.

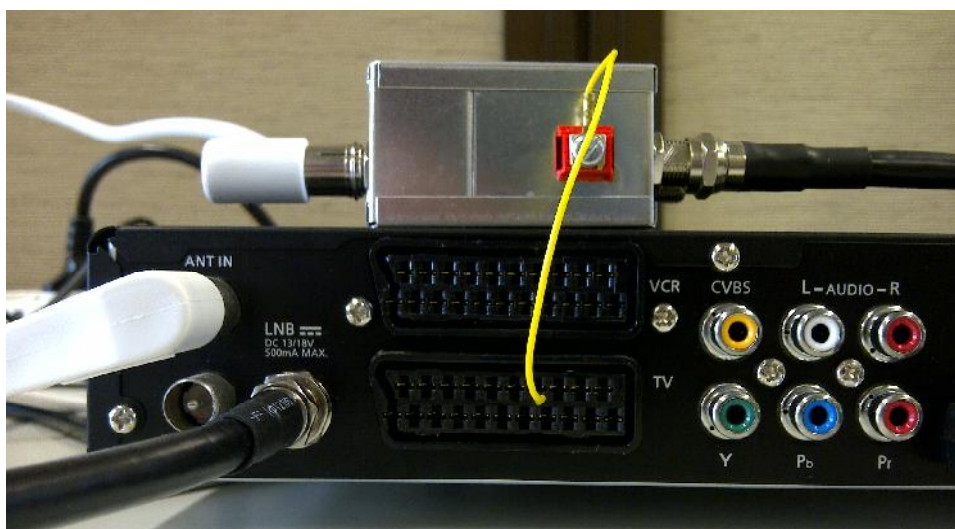

SAT Antenna Relay

SAR 12 F

To multiplex two SAT IF systems.



Model Art. No.	SAR 12 F 871406
EAN	4040326714065
Inputs / Outputs	1/2
Outdoor case	optional
Frequency range	47 ... 2200 MHz
Through loss	0,8 dB
Switching isolation Terr.	> 40 dB
Switching isolation SAT	> 25 dB
DC-pass per trunkline max.	500 mA
Control voltage	5 ... 18 V
Control current	< 0,5 ... 1,5 mA
Current from receiver max.	35 mA
Ambient temperature	-20 ... +50 °C
Dimensions (mm)	105 x 82 x 38