

Cat.6 F/UTP PVC, LSZH, PE 4x2x23 AWG (0,54)




Application

Multicore and symmetrical twisted pair cable for digital communications:

- Type **Cat. 6 F/UTP 4x2x23AWG (0,54)** is designed for structured cabling networks with single laying inside buildings, constructions and equipment. This cable type can operate at frequencies up to 250 MHz in conditions of increased electromagnetic action;
- Type **Cat. 6 F/UTP 4x2x23AWG LSZH (0,54)** is designed for structured cabling networks with single laying and laying in bundles inside buildings, constructions and equipment. This cable type can operate at frequencies up to 250 MHz in conditions of increased electromagnetic action and where low smoke emission is required;
- Type **Cat. 6 F/UTP 4x2x23AWG PE (0,54)** is designed for structured cabling networks with external laying along the walls of buildings, constructions, in mines and collectors. This cable type can operate at frequencies up to 250 MHz in conditions of increased electromagnetic action.



Cable structure

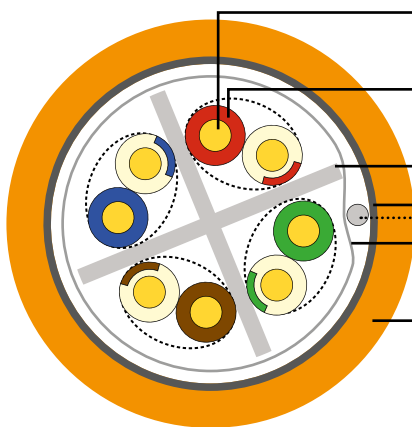

- **Conductive core:**
0,54 mm copper soft wire
- **Insulation:** HDPE polyethylene, colored marking of insulation
- **Cross divider**
- **Screen:** Al-Pet tape min. 100% coverage
- **Pet tape** min. 100% coverage
- **A tinned copper contact wire, Ø 26 AWG**
- **Sheath:**
LSZH/LSOH RAL 2003 Orange
PVC RAL 7001 Grey
PE RAL 9011 Black

Standards

ISO/IEC 11801-1, IEC 61156-5
EN 50288-5-1
ANSI EIA/TIA 568.2-D

Specifications

Temperature range: fixed.....	-20°C...+60°C
flexing.....	0°C...+50°C
Bending radius: fixed.....	min. 4 x D
flexing.....	min. 8 x D
Tensile strength.....	max. 100 N
Conductor resistance.....	max. 85 Ω/km
Resistance imbalance.....	max. 2%
Insulation resistance.....	min. 5000 MΩ x km
Capacitance.....	max. 56 pF/m
Capacity imbalance.....	max. 1600 pF/km
Velocity of propagation.....	67-69%
Propagation delay.....	max. 537 ns/100 m
Signal delay.....	max. 45 ns/100m
Test voltage.....	1000 V
Operating voltage.....	max. 72 V
TCL min. «Level 2»	
Coupling attenuation «Type II»	
Transfer impedance «Class 2»	

Fre- quency, MHz	Attenuation [dB/100 m]	NEXT [dB]	PS-NEXT [dB]	ACR [dB/100 m]	PS-ACR [dB/100 m]	ACR-F [dB/100 m]	PS-ACR-F [dB/100 m]	RL [dB]
	max.	min.	min.	min.	min.	min.	min.	min.
1*	2,1	75,3	72,3	73,2	70,2	68	65	20
4	3,8	66,3	63,3	62,4	59,4	56	53	23
10	6,0	60,3	57,3	54,3	51,3	48	45	25
16	7,6	57,2	54,2	49,6	46,6	43,9	40,9	25
31.25	10,7	52,9	49,9	42,1	39,1	38,1	35,1	23,6
62.50	15,5	48,4	45,4	32,9	29,9	32,1	29,1	21,5
100	19,9	45,3	42,3	25,4	22,4	28	25	20,1
250	33,0	39,3	36,3	6,3	3,3	20	17	17,3
350*	40,0	37,1	34,1	–	–	17,1	14,1	16,3

*Values up to 4 MHz and for 350 MHz are for general information

Cable structure	Diameter, mm nom	Cable weigh, kg/km, approx.	CPR classification EN 50575	Sheath color	Packaging, m
Cat. 6 F/UTP 4x2x23 AWG (0,54)	7,0	49	Eca	Grey	305/500/1000
Cat. 6 F/UTP 4x2x23 AWG LSZH (0,54)	7,0	52	Dca	Orange	305/500/1000
Cat. 6 F/UTP 4x2x23 AWG PE (0,54)	7,0	44	Fca	Black	305/500/1000