


## L2 Series Video Surveillance Micro SD (TF) Card

### Introduction

Hikvision L2 series Micro SD (TF) card is specially designed for video surveillance industry. It provides Class 10 R/W speed, adopts TLC NAND with high compatibility and low price, and is mainly applicable to low recording intensity scenes or simple operating scenes like lite storage, standby storage, etc.

### Available Models

HS-TF-L2/16G  
HS-TF-L2/32G  
HS-TF-L2/64G  
HS-TF-L2/128G  
HS-TF-L2/256G

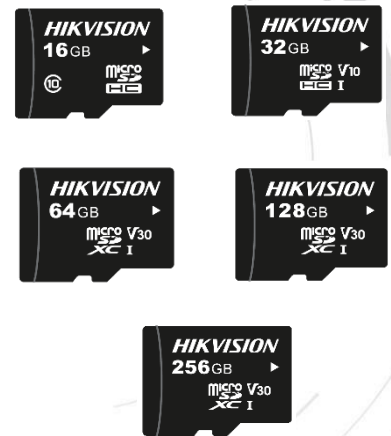

### Features and Functions

- **High Cost Performance**
  - Lower price compared to the cards with the same TLC NAND.
  - Fully satisfies requirements of lite storage.
- **High Compatibility**
  - Optimized by Hikvision storage system, it is compatible with more products than traditional SD (TF) cards.
  - Better performance when used with Hikvision cameras.
- **Ultra-Strong Adaptability**
  - Waterproof, shock proof, X-ray proof, and wide temperature range.



## Specifications

Model	HS-TF-L2				
Total capacity	16 GB	32 GB	64 GB	128 GB	256 GB
Max. read speed	95MB/s	95 MB/s	95 MB/s	95 MB/s	95 MB/s
Max. write speed	15 MB/s	25 MB/s	40 MB/s	50 MB/s	55 MB/s
Format	MicroSDHC	MicroSDHC	MicroSDXC	MicroSDXC	MicroSDXC
Speed	Class10, U1,V10	Class10, U1,V10	Class10,U3,V30	Class10,U3,V30	Class10,U3,V30
Dimensions	14.99 x 10.92 x 1.02mm (0.59 x 0.43 x 0.04 in)				
NAND flash memory	TLC (Triple-Level Cell)				
Storing temperature	-25 °C to +85°C (-13 °F to +185 °F)				
Operating temperature	0 °C to 70 °C (32 °F to 158 °F)				
Compatibility	Compatible with MicroSDHC, MicroSDXC, MicroSDHC UHS-I and MicroSDXC UHS-I host devices				
Limited warranty period	2 years				

**Note:** Performance test is performed in a specific testing environment. Any change of computer system, operation system, hardware, software, or functions will influence the test result.

Distributed by



Headquarters  
Room 307, Unit B, Building 2,  
399 Danfeng Road, Binjiang District,  
Hangzhou, Zhejiang, China

010000170825