Metal Standalone Keypad Access Control S601EM

S601

1. Features

· Indoor use
· Can connect external reader
· Aluminum alloy case, anti-vandal case
· Full programming from the keypad
· 2000 uses, supports Card, PIN, Card + PIN
· Can be used as a standalone keypad
· Backlight keys
· Wiegand 26 output for connecting to a controller
· Wiegand 26 input for connecting with a reader
· Adjustable Door Output time, Alarm time, Door Open time
· Very low power consumption (30mA)
· Fast operating speed, <20ms with 2000 users
· Lock output current short circuit protection
· Easy to install and program
· Built in light dependent resistor (LDR) for anti tamper
· Built in buzzer
· Red, Yellow and Green LEDS display the working status

2. Specifications

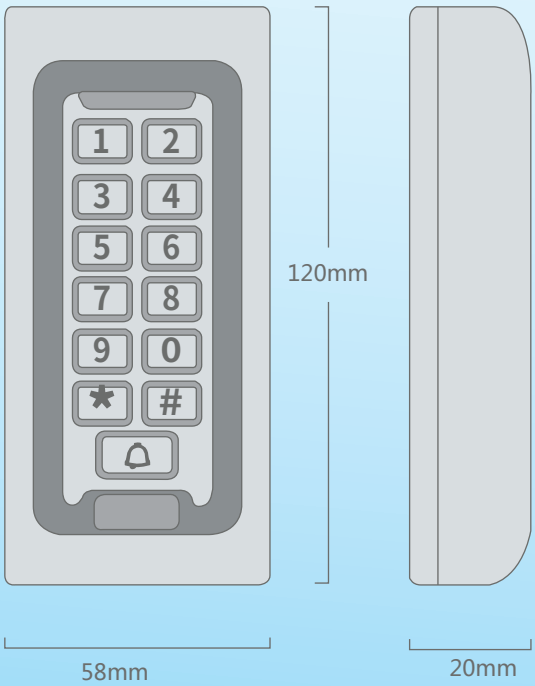

Operating Voltage	DC 12V±10%
User Capacity	2000
Card Type	EM
Card Reading Distance	3-6 cm
Active Current	＜60mA
Idle Current	25±5mA
Lock Output Load	Max 3A
Alarm Output Load	Max 20A
Operating Temperature	-45～60℃
Operating Humidity	10%- 90% RH
Environment	Conforms to IP68
Adjustable Door Relay time	0 -99 seconds
Adjustable Alarm Time	0- 3 minutes
Wiegand Interface	Wiegand 26 bits
Wiring Connections	Electric Lock, Exit Button, External Alarm & Reader
Dimensions	L120 x W58x H20 mm