



Optional Speaker: Coaxial Ceiling Speaker



HSR175-5C



HSR108-5C


Description

Small amplifier for background music system, output power reach 15W max@8 ohms low impedance output, has a 34x37mm display screen, it is suitable for office, restaurant, shop, etc.

Features


- 1, USB can play mp3 music files.
- 2, FM radio, support frequency from 88MHz to 108MHz.
- 3, Bluetooth, support smartphone/computer.
- 4, IR remote control to control all operations.

Panel Instruction:

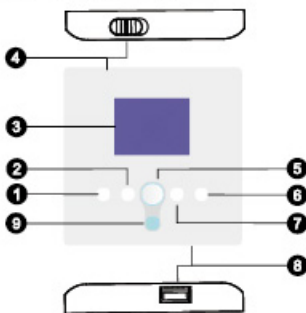

1. EQ select
2. Short press: PRE song
Long press: VOL-
3. Screen
4. Power switch
5. Short press: Play/Pause
Long press: FM search
6. Model switch:
USB-SD-FM-AUX-Bluetooth
7. Short press: sleep mode
Long press: sleep mode
8. Short press: Next song
Long press: VOL+
8. USB port
9. IR receiver

Terminal Description:

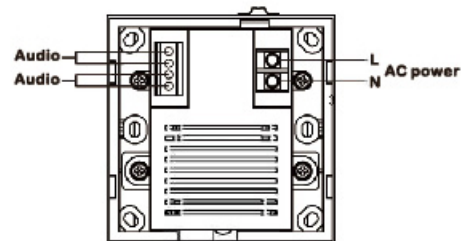

Specification	Model	HYC8615
Output Power		15W Stereo
Input Functions		USB, FM, Bluetooth
Frequency Response		20~20KHz
Output Interface		8-Ohms, 8Ω, Stereo(left and right)
Power Supply		AC110/220V(built-in transformer)
Dimensions: WxHxD		86x86x60